



# PANEL DATA SHEET

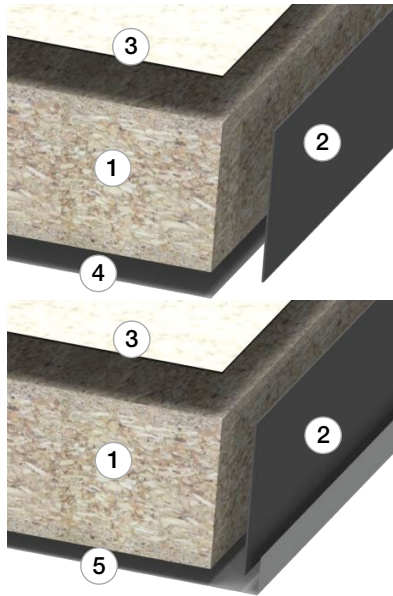

PTi 40

The panel consists of support material in wood chipboard added to resins with low emission of formaldehyde, of nominal density 720 kg / m<sup>3</sup>, with a nominal thickness of 38 mm. The material is certified in the environmental field according to the FSC, which guarantees the proper and responsible management of the forests from which the raw material constituent. The bottom side is coated, according to the needs, with a choice of materials that improve the characteristics. The panels are edged in plastic material antisqueak, a nominal thickness of 0.45 mm and a height equal to that of the panel. The nominal size of the panel depends on the caliber of the ceramic. The reduced dimensional tolerance causes the panel falls into Class 1 according to the reference standard EN 12825.

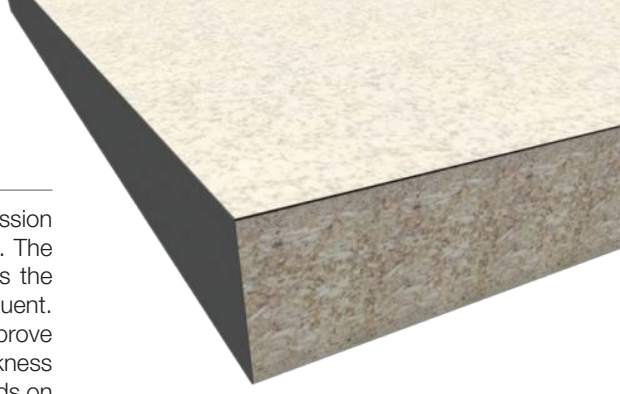

## COMPOSITION

### 1 CORE

Modular panel of chipboard (density 720 kg / mc) consists of wood particles bonded with thermosetting resins, obtained by the process of termopressing continuously in order to ensure high homogeneity of mechanical characteristics and dimensional stability of the product

### 2 EDGE TRIM

Made of plastic material compound antisqueak, a nominal thickness of 0.45 mm and a height equal to that of the panel, totally free from PVC and self-extinguishing (class V0 UL94 standard)

### 3 TOP FINISH

HPL, PVC, linoleum, rubber, carpet, Flooring, Porcelain, Terracotta, marble, granites and reassembled, aluminum, steel sheet

### 4 BOTTOM FINISH

Aluminum foil thickness. 0.05mm ensures excellent barrier against humidity and fire and electrical continuity to the floor. Plate phenolic laminate that increases the stiffness, the mechanical characteristics and constitutes a moisture barrier

### 5 BOTTOM FINISH

Steel plate / pan of galvanized steel of thickness 0.5 / 0.9 mm which increases the stiffness, the mechanical characteristics and an excellent moisture barrier

### Nominal characteristic

Dimension	600x600 mm
Thickness	38 mm
Panel weight	9,8 kg ± 5%
Weight SQM	27,0 kg ± 5%
Density	720 kg/mc ± 5%

### Physical characteristics

Dimensional deviations with resilient	class 1 (UNI EN 12825/03)
Dimensional deviations with ceramic	class 2 (UNI EN 12825/03)
Electrical resistance, top finish excluded	1x10 <sup>10</sup> ohm max (EN 1081)
Self-extinguishing edging	V0 (UL 94)
Walking sound level at 500Hz	21 dB
Fire rating	REI 30 (UNI EN 13501-2/09)
Fire reaction rating	Bfl-S1 (UNI EN 13501-1/09)
Formaldehyde emission	E1 Class

### Mechanical characteristics (EN 12825)

#### PANELS WITH RESILIENT AND PARQUET AS TOP FINISH

Bottom finish	Aluminium							Steel sheet / Steel tray					
	SAS	STQ	STS	STR	STO	STC	SAS	STQ	STS	STR	STO	STC	
Type of structure													
Concentrated load - center of the side	kN	1,5	1,7	1,8	1,9	2,0	2,2	2,0	2,3	2,4	2,5	2,5	3,2
Concentrated load - center of the panel	kN	2,3	2,3	2,4	2,7	2,8	3,3	3,2	3,2	3,3	3,5	3,5	4,2
Ultimate load	kN	7,1	8,0	8,2	8,9	9,1	11,1	10,0	12,8	13,0	14,0	14,5	15,5
Distributed load	kN/m <sup>2</sup>	13,0	13,8	14,0	17,0	18,0	18,5	16,5	17,8	17,0	20,5	20,5	21,5
Class according to EN 12825		2/A	3/A	3/A	3/A	4/A	5/A	5/A	6/A	6/A	6/A	6/A	6/A

#### PANELS WITH LAMINATE AS TOP FINISH

Bottom finish	Aluminium							Steel sheet / Steel tray					
	SAS	STQ	STS	STR	STO	STC	SAS	STQ	STS	STR	STO	STC	
Type of structure													
Concentrated load - center of the side	kN	1,7	1,8	1,9	2,4	2,4	2,9	2,9	3,0	3,1	3,2	3,2	3,5
Concentrated load - center of the panel	kN	2,7	2,8	2,9	3,3	3,3	4,0	3,6	3,7	3,8	3,9	3,9	4,6
Ultimate load	kN	8,4	9,1	9,3	10,0	10,0	12,1	10,9	13,3	13,5	14,5	15,0	16,0
Distributed load	kN/m <sup>2</sup>	14,1	14,8	15,0	18,0	19,0	19,5	17,5	17,8	18,0	21,5	21,5	22,5
Class according to EN 12825		3/A	4/A	4/A	5/A	5/A	6/A	5/A	6/A	6/A	6/A	6/A	6/A

#### PANELS WITH GRES AS TOP FINISH

Bottom finish	Aluminium							Steel sheet / Steel tray					
	SAS	STQ	STS	STR	STO	STC	SAS	STQ	STS	STR	STO	STC	
Type of structure													
Concentrated load - center of the side	kN	2,4	2,9	3,0	3,3	3,3	3,6	2,5	2,9	3,0	3,4	3,4	3,8
Concentrated load - center of the panel	kN	3,7	3,7	3,8	4,0	4,0	4,8	4,0	4,0	4,1	4,5	4,5	5,3
Ultimate load	kN	8,5	8,8	9,0	9,2	9,3	14,5	12,0	12,3	12,5	14,0	14,5	15,5
Distributed load	kN/m <sup>2</sup>	18,0	18,3	18,5	22,5	23,0	23,6	19,0	19,3	19,5	23,5	24,0	24,6
Class according to EN 12825		3/A	4/A	4/A	4/A	4/A	6/A	6/A	6/A	6/A	6/A	6/A	6/A

The concentrated and distributed loads refer to a 2,5 mm deflection. Deformations major than 1 mm may cause the ceramic to crack.  
\*1 kN = 102 kg