


SUPPORT DATA SHEET



AN 4

Supply and installation of supports for raised floors, adjustable in height, equipped with be-material head, with anti-noise and anti-slip rubber finish. The supports consist of polypropylene elements consisting of a support base with a minimum diameter of mm. 205, a screw with variable height from mm. 90 to mm. 160, equipped with an anti-unscrewing safety block and a head equipped with n. 4 spacers, h. mm. 12 with a thickness of mm. 2-3-4, easily removable in case of need. In the base there are holes for the outflow of water and n. 4 "guidelines" to facilitate cutting in case of need. Height adjustment is carried out using a special standard adjustment key, which acts on the screw independently of both the head and the base.

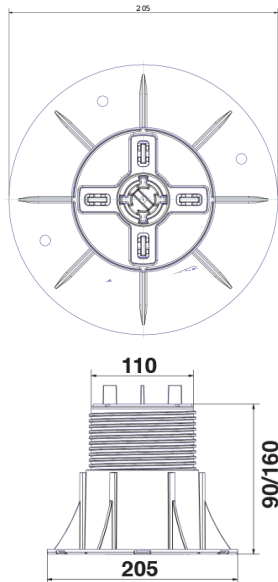

PRODUCT LINE

1 PRODUCT CODE

AN 4

2 CHARACTERISTICS

Height adjustment. Bi-material head (PP + Rubber). Height adjustment key. Easily removable spacer flaps. Anti-unscrewing safety lock.

3 RAW MATERIAL

Polypropylene and rubber (head finish).

4 ENVIROMENTAL IMPACT

Recyclable - not dangerous waste

5 APPLICATION AREA (SUPPORTING PLAN)

On any waterproof membrane. On any rigid insulation panel. On any solid and compact laying surface.

6 APPLICATION AREA (FLOORING)


With any self-supporting prefabricated element for outdoor flooring, with a minimum thicknesses of mm. 15.

Technical characteristic


Central compression limit resistance	29,57 kN
Limit resistance to eccentric compression	16,75 kN
Slope compensation	0-5 %
Hardness	70 (±3) Shore d

Physico-chemical characteristics

Reaction to fire	class E (UNI EN 13501-1:2009)
Resistance to low temperatures	-40°



LIMIT RESISTANCE A
CENTRAL COMPRESSION
(calculated at medium height,
between minimum and maximum)



LIMIT RESISTANCE A
ECCENTRIC COMPRESSION
(calculated at medium height,
between minimum and maximum)

MORPHOLOGICAL CHARACTERISTICS

	Unit	Value	Tolerance
Bse diameter	mm	205	± mm 1,0
Base thickness	mm	2	± mm 0,2
Head diameter	mm	110	± mm 0,8
Support surface	cmq	330	± cmq 5
Minimum height	mm	90	± mm 1,0
Maximum height	mm	160	± mm 1,5
Space flaps thickness	mm	2-3-4	± mm 0,2
Altezza alette distanziatrici	mm	12	± mm 0,2
Weight	kg	0,441	± 5%

PACKAGING AND STORAGE

	Value
Pieces for box	20
Boxes for pallet	30
Box size	cm 40 x 40 x 42
Box weight	kg 9,6
Pallet size	cm 80 x 120

INSTALLATION MODALITY

The product is laid dry, without the need for adhesive or other types of fixings.